



Technical specifications

Q-RRC

Application:	Helideck, Heliport
IP-Index:	IP66
Enclosure:	Steel, Powder coated
Dimensions:	60 x 60 x 22 cm (L x W x H)
Mounting:	Wallmount
Input Voltage:	230 Vac
Cable:	H07RN-F 3x1
Operating Voltage:	12 Vdc

Technical Background

Q Aviation stands for simplicity but high functionality in their products. Being able to control your lighting system from the safe area or remote is a basic need.

Control assembly

The Q-RRC is the L854 standard solution for switching on and off your lighting remote.

The basic functions are taken care of using only high quality branded components.

The Q-RRC can Operate 3 modes. One by clicking the communication 3 times, 5 times and 7 times.

Operation

The Q-RRC has three modes in which the lights can be switched on. By clicking the communication 3 times, 5 times or 7 times.

Each mode switches a different relay. This enables the user to choose for different light intensities or different light groups that will be switched on.

The Q-RRC controller cabinet is IP66 and can be mounted on outside locations.



Info@q-avi.com


Dam 8
1012NP
Amsterdam
The Netherlands

Version 1.0
date: 19-05-2016



General dimensions

In the image below the general dimensions and mounting dimensions are displayed.

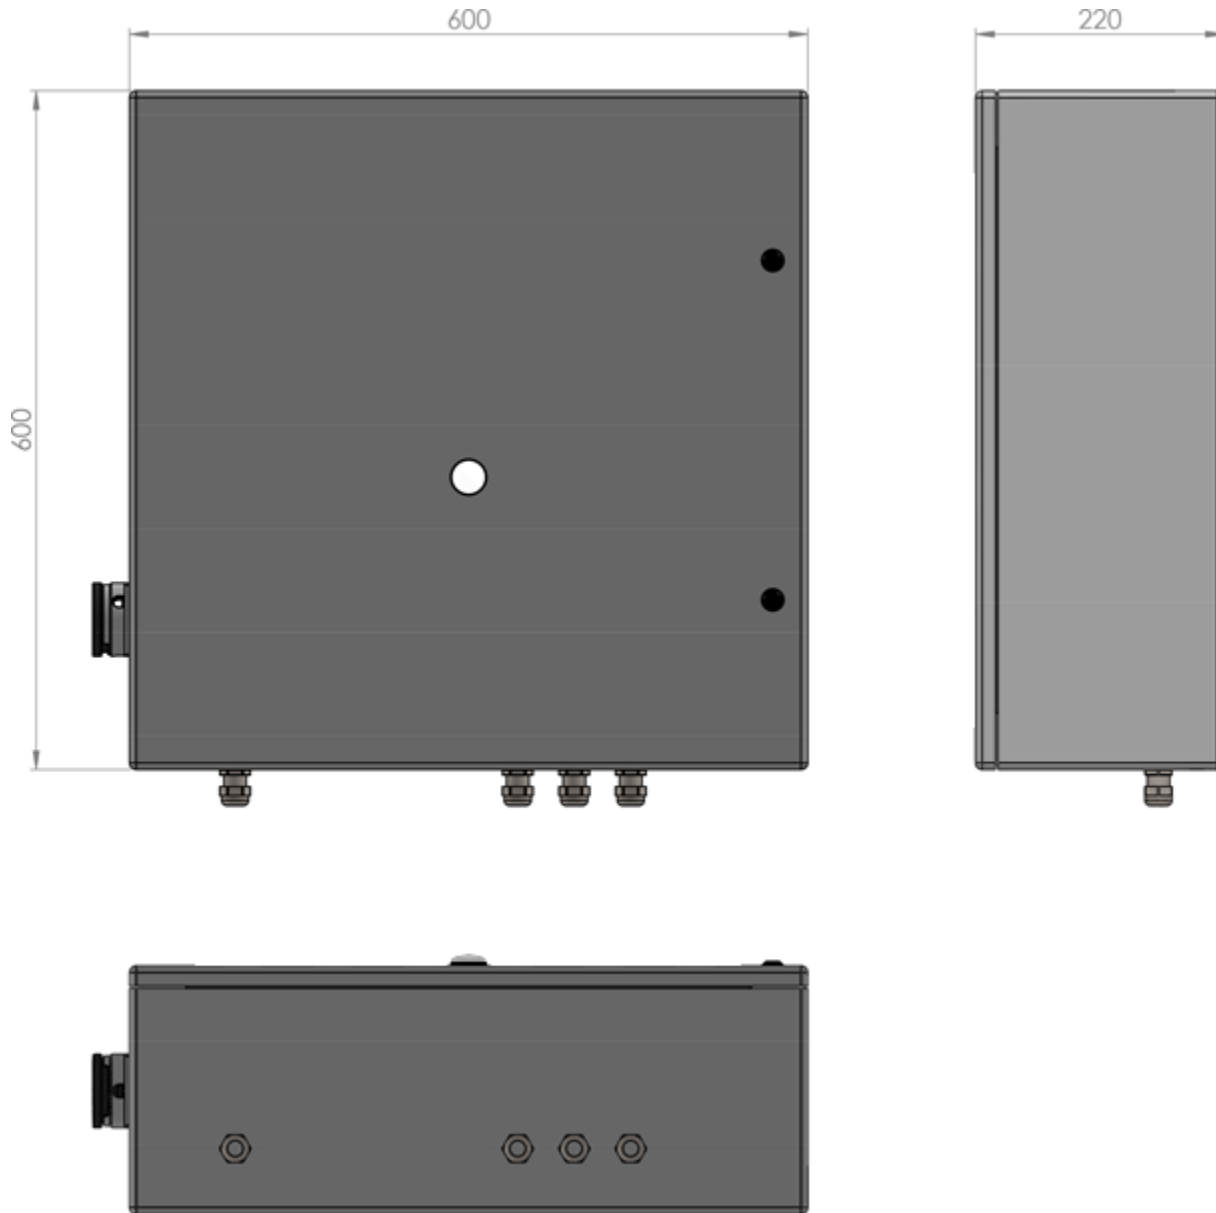

Order codes

The following order codes are available:

Order Code	Configuration
Q7103	Q-RRC, 230 Vac